


JTR-HL16 G100 Eyes Shortening Grap Hook



Green painted.other colour is available as per request.
Working load limit permanently shown on the body.
Max proof load is 2.5 times of the working load limited.
Min.Breaking strength is 4 times of the W.L.L.

| Size | W.L.L | B.L | Dimension (mm) | | | | Weight |
|-------|-------|------|----------------|------|-------|-------|--------|
| | (t) | (t) | E | Φ | D | M | kg/pc |
| 6-10 | 1.4 | 5.6 | 8 | 14.5 | 30.5 | 43.5 | 0.2 |
| 8-10 | 2.5 | 10 | 10.8 | 18 | 37 | 53 | 0.28 |
| 10-10 | 4 | 16 | 13.5 | 22.5 | 48.5 | 42 | 0.72 |
| 13-10 | 6.7 | 26.8 | 16.5 | 28 | 59 | 96 | 1.6 |
| 16-10 | 10 | 40 | 19.2 | 36 | 74 | 112.5 | 2.45 |
| 20-10 | 16 | 64 | 24 | 43.5 | 89.5 | 143 | 4.72 |
| 22-10 | 19 | 76 | 27 | 48.5 | 100.5 | 160.5 | 8.2 |


JTR-HL17 G100 Master Link with Flat

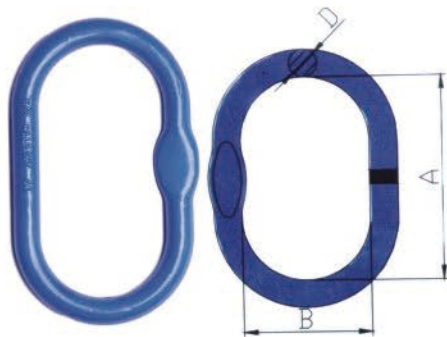

Green painted.other colour is available as per request.
Working load limit permanently shown on the body.
Max proof load is 2.5 times of the working load limited.
Min.Breaking strength is 4 times of the W.L.L.

| Size | W.L.L | B.L | Dimension (mm) | | | (CHAINΦ) | | | Weight |
|-------|-------|-------|----------------|-----|----|----------|-------|---------|--------|
| | (t) | (t) | A | B | D | 1leg | 2legs | 3-4legs | kg/pc |
| 10-10 | 1.4 | 5.6 | 80 | 50 | 10 | 5 | 5 | 5 | 0.14 |
| 13-10 | 2.3 | 9.2 | 110 | 60 | 13 | 6 | 6 | 6 | 0.34 |
| 16-10 | 3.5 | 14 | 110 | 60 | 16 | 7 | 7 | 7 | 0.53 |
| 18-10 | 5 | 20 | 135 | 75 | 18 | 8 | 8 | 8 | 0.83 |
| 22-10 | 7.6 | 30.4 | 160 | 90 | 23 | 10 | 10 | 10 | 1.6 |
| 26-10 | 10 | 40 | 180 | 100 | 27 | 13 | 13 | 13 | 2.46 |
| 32-10 | 14 | 56 | 200 | 110 | 33 | 16 | 16 | 16 | 4.14 |
| 36-10 | 25.1 | 100.4 | 260 | 140 | 36 | 19 | 19 | 19 | 6.22 |
| 45-10 | 30.8 | 123.2 | 340 | 180 | 45 | 22 | 22 | 22 | 12.85 |
| 50-10 | 40 | 160 | 350 | 190 | 50 | 26 | 26 | 26 | 16.55 |
| 56-10 | 60 | 240 | 400 | 200 | 60 | 32 | 32 | 32 | 27.01 |
| 72-10 | 81.5 | 326 | 460 | 250 | 70 | - | - | - | 45 |

JTR-HL18 G100 Master Link Assembly with Flat

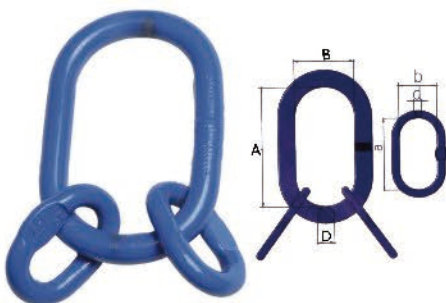

Green painted.other colour is available as per request.
Working load limit permanently shown on the body.
Max proof load is 2.5 times of the working load limited.
Min.Breaking strength is 4 times of the W.L.L.

| Size | W.L.L | B.L | Dimension (mm) | | | | | | Weight |
|-------|-------|------|----------------|-----|----|-----|----|------|--------|
| | (t) | (t) | A | B | D | a | b | d | kg/pc |
| 6-10 | 3 | 12 | 135 | 75 | 19 | 54 | 25 | 13 | 1.3 |
| 8-10 | 5.3 | 21.2 | 160 | 90 | 23 | 70 | 34 | 16.5 | 2.33 |
| 10-10 | 8 | 32 | 180 | 100 | 27 | 85 | 40 | 19 | 3.7 |
| 13-10 | 14 | 56 | 200 | 110 | 33 | 115 | 50 | 23 | 6.5 |
| 16-10 | 21.2 | 84.8 | 260 | 140 | 36 | 140 | 65 | 27 | 10.1 |